



### Electrical specification

Voltage:	12V
Capacity C <sup>20</sup> :	62 Ah
Cold cranking current:	580 CCA [SAE]
Reserve Capacity:	95 [mins]

### Mechanical specification

Dimensional group:	L2
ETN reference:	646US
Dimensions <sup>A</sup> in mm (LxWxH):	242x175x190
Terminal Polarity:	2
Terminal Type:	A

### Container

Case	Material	Polypropylene
	Bottom hold-down	B3
	Colour	Black

Lid	Material	Polypropylene
	Cover design	KAMINA
	Colour	Black

Vent caps	Material	Polypropylene
	Type	KAMINA
	Colour	Black

Handles	Material	Polypropylene
	Position	Top - on lid
	Colour	Black


### Battery classification

Water consumption	Charge retention	Vibration resistance	Endurance Level
W3	C2	V1	E1


### Weight<sup>B</sup>

Battery weight in kg:	9.60
Acid weight in kg:	5.10
Total battery weight in kg:	14.70

### Layout

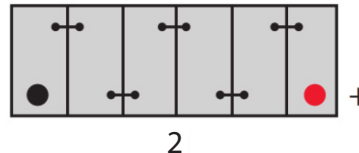

### Hold-down



### Separator

Type	PE
------	----

- A. Height taken from bottom of the battery to the highest point on the battery. Heights may vary depending on type of terminal.
- B. Weight may vary ±5%.