



### Electrical specification

Voltage:	12V
Capacity C <sup>20</sup> :	70 Ah
Cold cranking current:	605 CCA [SAE]
Reserve Capacity:	110 min

### Mechanical specification

Dimensional group:	D31
ETN reference:	650US
Dimensions <sup>A</sup> in mm (LxWxH):	304x173x220
Terminal Layout:	1
Terminal Type:	A

### Container

Case	Material	Polypropylene
	Bottom hold-down	B1
	Colour	Black

Lid	Material	Polypropylene
	Cover design	SMF
	Colour	Black

Vent caps	Material	Polypropylene
	Type	SMF
	Colour	Black

Handles	Material	Polypropylene
	Position	Top - on lid
	Colour	Black


### Battery classification

Water consumption	Charge retention	Vibration resistance	Endurance Level
W4	C2	V1	E1

### Weight<sup>B</sup>

Battery weight in kg:	11.10
Acid weight in kg:	7.30
Total battery weight in kg:	18.40

### Layout

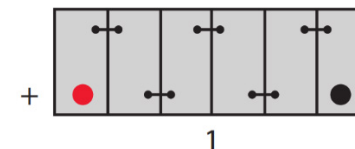

### Hold-down



### Separator

Type	PE
------	----

- A. Height taken from bottom of the battery to the highest point on the battery. Heights may vary depending on type of terminal.
- B. Weight may vary ±5%.