TECHNICAL DATASHEET - 674D

DYNAMIC
HEAVY DUTY
TIR
24 MONTH WARRANTY



Electrical specification

Voltage:	**12V**
Capacity C^{20}:	**105 Ah**
Cold cranking current:	**850 CCA [SAE]**
Reserve Capacity:	**185 min**

Mechanical specification

Dimensional group:	**G31**
ETN reference:	**674D**
Dimensions[A] in mm (LxWxH):	**336x173x235**
Cell Layout:	**4**
Terminal Type:	**A**

Container

Case	**Material**	**Polypropylene**
	Bottom hold-down	**B0**
	Colour	**Black**

Lid	**Material**	**Polypropylene**
	Cover design	**SMF**
	Colour	**Black**

Vent caps	**Material**	**Polypropylene**
	Type	**Integrated**
	Colour	**Black**

Handles	**Material**	**Polypropylene**
	Position	**Top - on lid**
	Colour	**Black**


Weight[B]

Battery weight in kg:	**16.20**
Acid weight in kg:	**8.20**
Total battery weight in kg:	**24.40**


Separator

Type	**PE**

Layout

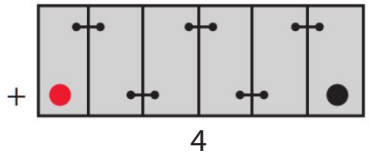

Hold-down



A. Height taken from bottom of the battery to the highest point on the battery. Heights may vary depending on type of terminal.
B. Weight may vary ±5%.

Date of update: 17.03.2025