

DYNAMIC

**LIGHT
DUTY**



**18
MONTH
WARRANTY**



Electrical specification

Voltage:	12V
Capacity C²⁰:	45 Ah
Cold cranking current:	380 CCA [SAE]
Reserve Capacity:	66 min

Mechanical specification

Dimensional group:	LB2
ETN reference:	628D
Dimensions^A in mm (LxWxH):	242x175x175
Cell Layout:	2
Terminal Type:	A

Container

Case	Material	Polypropylene
	Bottom hold-down	B4
	Colour	Black

Lid	Material	Polypropylene
	Cover design	SMF
	Colour	Black

Vent caps	Material	Polypropylene
	Type	SMF
	Colour	Black

Handles	Material	Polypropylene
	Position	Top - on lid
	Colour	Black


Battery classification

Water consumption	Charge retention	Vibration resistance	Endurance Level
W3	C2	V1	E1


Weight^B

Battery weight in kg:	7.60
Acid weight in kg:	3.90
Total battery weight in kg:	11.50

Layout

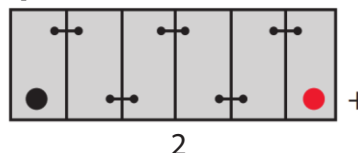

Hold-down



Separator

Type	PE
-------------	-----------

- A.** Height taken from bottom of the battery to the highest point on the battery. Heights may vary depending on type of terminal.
B. Weight may vary $\pm 5\%$.

Date of update: 11.03.2024