



Electrical specification

Voltage:	12V
Capacity C ²⁰ :	170 Ah
Cold cranking current:	1000 CCA [SAE]
Reserve Capacity:	330 min

Mechanical specification

Dimensional group:	B
ETN reference:	692D
Dimensions ^A in mm (LxWxH):	513x223x223
Cell Layout:	4
Terminal Type:	A

Container

Case	Material	Polypropylene
	Bottom hold-down	B0
	Colour	Black

Lid	Material	Polypropylene
	Cover design	SMF
	Colour	Black

Vent caps	Material	Polypropylene
	Type	SMF
	Colour	Black

Handles	Material	Polypropylene
	Position	Sides - on container
	Colour	Black


Battery classification

Water consumption	Charge retention	Vibration resistance	Endurance Level
W4	C2	V2	E2

Weight^B

Battery weight in kg:	28.00
Acid weight in kg:	14.30
Total battery weight in kg:	42.30

Layout

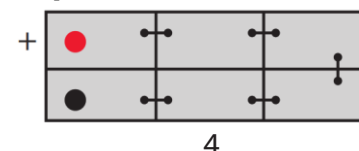

Hold-down



Separator

Type	PE with Glass Mat
------	-------------------

- ^{A.} Height taken from bottom of the battery to the highest point on the battery. Heights may vary depending on type of terminal.
^{B.} Weight may vary ±5%.