


DYNAMIC

**LIGHT
DUTY**



**18
MONTH
WARRANTY**

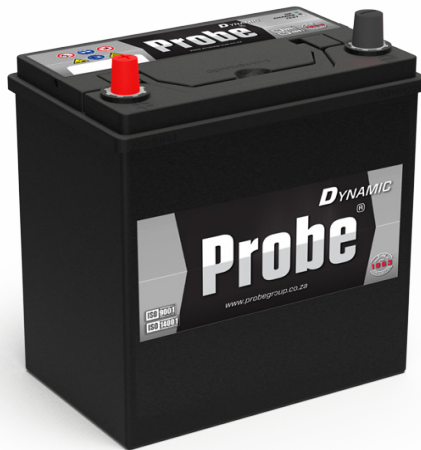

Electrical specification

| | |
|---------------------------------|----------------------|
| Voltage: | 12V |
| Capacity C²⁰: | 45 Ah |
| Cold cranking current: | 380 CCA [SAE] |
| Reserve Capacity: | 71 min |

Mechanical specification

| | |
|----------------------------------------------|--------------------|
| Dimensional group: | NS60 |
| ETN reference: | 634D RAISED |
| Dimensions^A in mm (LxWxH): | 237x128x220 |
| Cell Layout: | 1 |
| Terminal Type: | A |

Container

| | | |
|-------------|-------------------------|----------------------|
| Case | Material | Polypropylene |
| | Bottom hold-down | B0 |
| | Colour | Black |

| | | |
|------------|---------------------|----------------------|
| Lid | Material | Polypropylene |
| | Cover design | SMF |
| | Colour | Black |

| | | |
|------------------|-----------------|----------------------|
| Vent caps | Material | Polypropylene |
| | Type | SMF |
| | Colour | Black |

| | | |
|----------------|-----------------|----------------------|
| Handles | Material | Polypropylene |
| | Position | Top - on lid |
| | Colour | Black |


Battery classification

| | | | |
|--------------------------|-------------------------|-----------------------------|------------------------|
| Water consumption | Charge retention | Vibration resistance | Endurance Level |
| W4 | C2 | V1 | E1 |

Weight^B

| | |
|------------------------------------|--------------|
| Battery weight in kg: | 7.60 |
| Acid weight in kg: | 4.00 |
| Total battery weight in kg: | 11.60 |

Layout

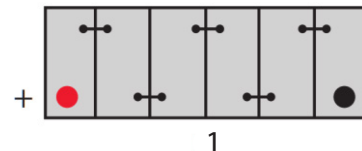

Hold-down



Separator

| | |
|-------------|-----------|
| Type | PE |
|-------------|-----------|

A. Height taken from bottom of the battery to the highest point on the battery. Heights may vary depending on type of terminal.
B. Weight may vary ±5%.