TECHNICAL DATASHEET - 658D

DYNAMIC
LIGHT DUTY
24 MONTH WARRANTY



Electrical specification

Voltage:	**12V**
Capacity C^{20}:	**100 Ah**
Cold cranking current:	**860 CCA [SAE]**
Reserve Capacity:	**168 min**

Mechanical specification

Dimensional group:	**L5**
ETN reference:	**658D**
Dimensions[A] in mm (LxWxH):	**353x175x190**
Cell Layout:	**2**
Terminal Type:	**A**

Container

Case	**Material**	**Polypropylene**
	Bottom hold-down	**B13**
	Colour	**Black**

Lid	**Material**	**Polypropylene**
	Cover design	**SMF**
	Colour	**Black**

Vent caps	**Material**	**Polypropylene**
	Type	**SMF**
	Colour	**Black**

Handles	**Material**	**Polypropylene**
	Position	**Top - on lid**
	Colour	**Black**


Battery classification

Water consumption	Charge retention	Vibration resistance	Endurance Level
W3	**C2**	**V1**	**E1**


Weight[B]

Battery weight in kg:	**15.20**
Acid weight in kg:	**7.15**
Total battery weight in kg:	**22.35**

Layout

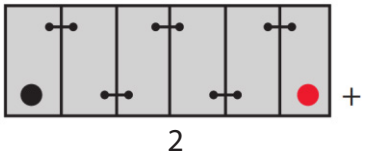

Hold-down



Separator

Type	**PE**

A. Height taken from bottom of the battery to the highest point on the battery. Heights may vary depending on type of terminal.
B. Weight may vary ±5%.

Date of update: 11.03.2024