



Electrical specification

Voltage:	12V
Capacity C ²⁰ :	60 Ah
Cold cranking current:	600 CCA [SAE]
Reserve capacity:	100 CCA [SAE]

Mechanical specification

Dimensional group:	L2
ETN reference:	646AGM
Dimensions ^A in mm (LxWxH):	242x175x190
Terminal Polarity:	2
Terminal Type:	1

Container

Case	Material	Polypropylene
	Bottom hold-down	B13
	Colour	Black

Lid	Material	Polypropylene
	Cover design	KAMINA
	Colour	Black

Vent caps	Material	Polypropylene
	Type	KAMINA
	Colour	Black

Handles	Material	Polypropylene
	Position	Top - on lid
	Colour	Black


Battery classification

Water consumption	Charge retention	Vibration resistance	Endurance Level	Micro-cycle performance
W4	C2	V3	E3	M2

Weight^B

Battery weight in kg:	14.40
Acid weight in kg:	4.10
Total battery weight in kg:	18.50

Layout

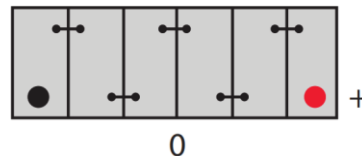

Hold-down



Separator

Type	AGM
------	-----

- A. Height taken from bottom of the battery to the highest point on the battery. Heights may vary depending on type of terminal.
- B. Weight may vary ±5%.