



### Electrical specification

Voltage:	12V
Capacity C <sup>20</sup> :	70 Ah
Cold cranking current:	820 CCA [SAE]
Reserve Capacity:	115 CCA [SAE]

### Mechanical specification

Dimensional group:	L3
ETN reference:	652AGM
Dimensions <sup>A</sup> in mm (LxWxH):	278x175x190
Terminal Polarity:	2
Terminal Type:	1

### Container

Case	Material	Polypropylene
	Bottom hold-down	B13
	Colour	Black

Lid	Material	Polypropylene
	Cover design	KAMINA
	Colour	Black

Vent caps	Material	Polypropylene
	Type	KAMINA
	Colour	Black

Handles	Material	Polypropylene
	Position	Top - on lid
	Colour	Black


### Battery classification

Water consumption	Charge retention	Vibration resistance	Endurance Level	Micro-cycle performance
W4	C2	V3	E3	M2


### Weight<sup>B</sup>

Battery weight in kg:	16.20
Acid weight in kg:	5.00
Total battery weight in kg:	21.20

### Layout

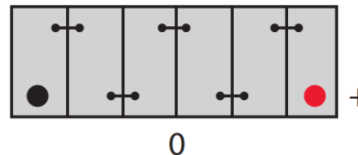

### Hold-down



### Separator

Type	AGM
------	-----

A. Height taken from bottom of the battery to the highest point on the battery. Heights may vary depending on type of terminal.  
 B. Weight may vary ±5%.