



Electrical specification

Voltage:	12V
Capacity C ²⁰ :	80 Ah
Cold cranking current:	900 CCA [SAE]
Reserve Capacity:	150 CCA [SAE]

Mechanical specification

Dimensional group:	L4
ETN reference:	668AGM
Dimensions ^A in mm (LxWxH):	310x175x190
Terminal Polarity:	2
Terminal Type:	1

Container

Case	Material	Polypropylene
	Bottom hold-down	B13
	Colour	Black

Lid	Material	Polypropylene
	Cover design	KAMINA
	Colour	Black

Vent caps	Material	Polypropylene
	Type	KAMINA
	Colour	Black

Handles	Material	Polypropylene
	Position	Top - on lid
	Colour	Black


Battery classification

Water consumption	Charge retention	Vibration resistance	Endurance Level	Micro-cycle performance
W4	C2	V3	E3	M2


Weight^B

Battery weight in kg:	18.10
Acid weight in kg:	3.00
Total battery weight in kg:	21.10

Layout

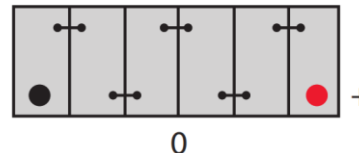

Hold-down



Separator

Type	AGM
------	-----

- A. Height taken from bottom of the battery to the highest point on the battery. Heights may vary depending on type of terminal.
- B. Weight may vary ±5%.