



Electrical specification

Voltage:	12V
Capacity C²⁰:	140 Ah
Cold cranking current:	1100 CCA [SAE]
Reserve Capacity:	265 CCA [SAE]

Mechanical specification

Dimensional group:	A
ETN reference:	686AGM
Dimensions^A in mm (LxWxH):	513x189x223
Terminal Polarity:	4
Terminal Type:	1

Container

Case	Material	Polypropylene
	Bottom hold-down	B0
	Colour	Black

Lid	Material	Polypropylene
	Cover design	Kamina
	Colour	Black

Vent caps	Material	Polypropylene
	Type	Kamina
	Colour	Black

Handles	Material	Polypropylene
	Position	Sides - on container
	Colour	Black


Battery classification

Water consumption	Charge retention	Vibration resistance	Endurance Level
W4	C2	V3	E3

Weight^B

Battery weight in kg:	30.40
Acid weight in kg:	10.30
Total battery weight in kg:	40.70

Layout

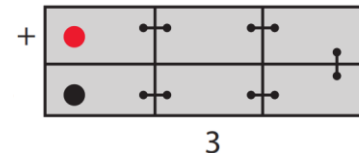

Hold-down



Separator

Type	AGM
-------------	------------

- A.** Height taken from bottom of the battery to the highest point on the battery. Heights may vary depending on type of terminal.
- B.** Weight may vary ±5%.