



## Electrical specification

<b>Voltage:</b>	<b>12V</b>
<b>Capacity C<sup>20</sup>:</b>	<b>225 Ah</b>
<b>Cold cranking current:</b>	<b>1320 CCA [SAE]</b>
<b>Reserve Capacity:</b>	<b>450 CCA [SAE]</b>

## Mechanical specification

<b>Dimensional group:</b>	<b>C</b>
<b>ETN reference:</b>	<b>695EFB</b>
<b>Dimensions<sup>A</sup> in mm (LxWxH):</b>	<b>514x276x242</b>
<b>Terminal Polarity:</b>	<b>4</b>
<b>Terminal Type:</b>	<b>1</b>

## Container

<b>Case</b>	<b>Material</b>	<b>Polypropylene</b>
	<b>Bottom hold-down</b>	<b>B0</b>
	<b>Colour</b>	<b>Black</b>

<b>Lid</b>	<b>Material</b>	<b>Polypropylene</b>
	<b>Cover design</b>	<b>SMF</b>
	<b>Colour</b>	<b>Black</b>

<b>Vent caps</b>	<b>Material</b>	<b>Polypropylene</b>
	<b>Type</b>	<b>SMF</b>
	<b>Colour</b>	<b>Black</b>

<b>Handles</b>	<b>Material</b>	<b>Polypropylene</b>
	<b>Position</b>	<b>Sides - on container</b>
	<b>Colour</b>	<b>Black</b>


## Battery classification

<b>Water consumption</b>	<b>Charge retention</b>	<b>Vibration resistance</b>	<b>Endurance Level</b>
<b>W4</b>	<b>C2</b>	<b>V3</b>	<b>E3</b>

## Weight<sup>B</sup>

<b>Battery weight in kg:</b>	<b>40.60</b>
<b>Acid weight in kg:</b>	<b>19.55</b>
<b>Total battery weight in kg:</b>	<b>60.15</b>

## Layout

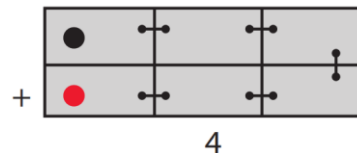

## Hold-down



## Separator

<b>Type</b>	<b>PE</b>
-------------	-----------

- A.** Height taken from bottom of the battery to the highest point on the battery. Heights may vary depending on type of terminal.
- B.** Weight may vary ±5%.